

Anfal® **الأنفال**
Dalton



Door Hardware Range





CONTRACT RANGE - INDEX

1- contract range of lever handle	page	1
2- contract range of lock cases and cylinder	page	2 , 3
3-contract range of plates	page	4
4-contract range of pull handle and push	page	5
5-contract range of Door closer	page	6
6-contract range of panic exit hardware	page	7
7-contract range of accessories	page	8 , 9
8- fire rated louver	page	9
9- contract range of Hinges	page	10 , 11

INDEX


Contract range of lever handle

-Lever Handle - Rose Mounted

- Round bar return to door' lever pre-fixed to a 8mm sprung rose
- Supplied with bolt through' and face fixings
- Metal inner rose
- 8mm spindle supplied
- SS & PS finishes are Grade 202 , 304





Code: 2430098

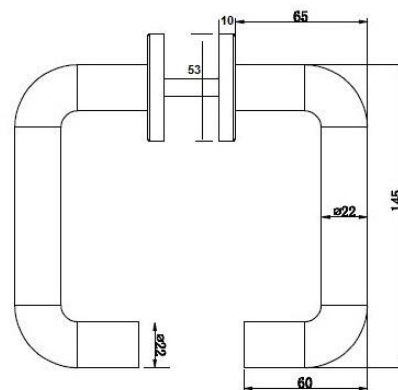

- Code: 2430098-19mm
- A series of escutcheons with concealed fixings for use with rose mounted levers or Pull handles

Diameter	ø	ø
Lever handle	19	22

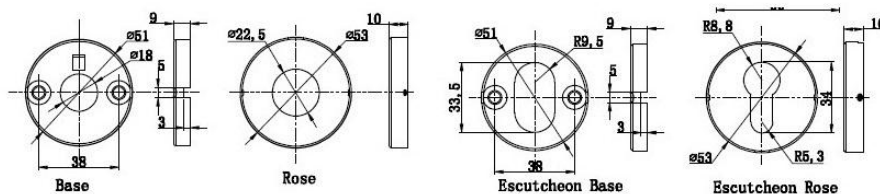




Contract range lock cases

-euro profile cylinder
mortise lockcases designed
to meet the requirements of
BS EN 12209



- Slim line case with 6 function variants
 - Modular design allows interchangeability of lock models
 - Meets the requirements of BS EN12209
 - 55 or 60mm backset
 - (Escape sash lock 55mm backset)
 - 72mm Euro profile centers.
 - Quick reversible latch bolt
- Code: 2430029

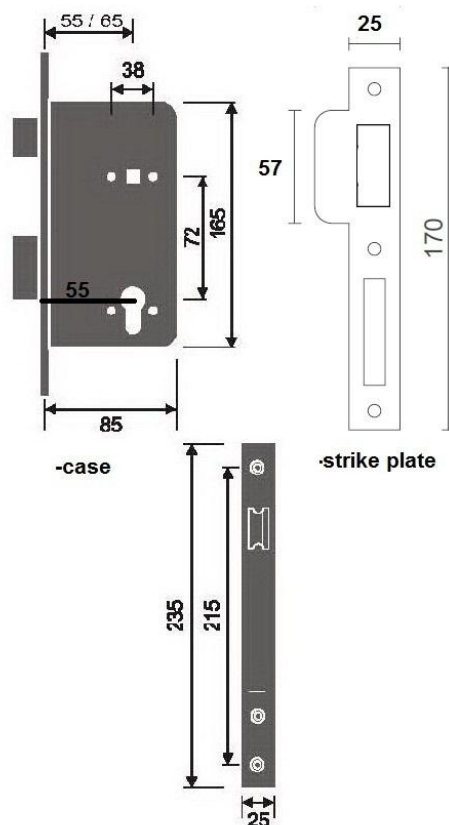

Contract Range of cylinder

A series of euro profile cylinders for use with Standard or Fire Rated cylinder locks

- 5 Pin cylinders as standard (6 pin available to order)
- Satin nickel plated finish (SNP) as standard
- Supplied with 3 keys

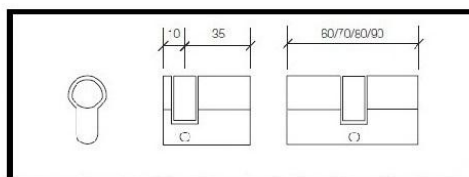

Code: 2430018





Contract range lock cases

Single Cylinder Deadbolt Door Lock



Single Cylinder Deadbolts are the most commonly used for doors. Single cylinder deadbolts require a key to unlock and lock the door from the outside. From the inside the door can be locked or unlocked with a simply turning the thumb turn mechanism.

Code: 2430161

Finish: satin chrome



A= door thickness



Striking plate





Contract range plates

- Push plates for use with bolt through pull handles
- supplied complete with screws
- Plate thickness 1.5mm


Code: customized by the requirement

Push Plates		
Item	Size (mm)	
	H	w
Plate	300 x 100	
Plate	400 x 100	
Engraved plate	300 x 100	



• Kicking plates

- Kicking plates - specify size required
- Square corners drilled - supplied complete with screws
- Plate thickness 1.5mm
- SS & PS finishes are Grade 304

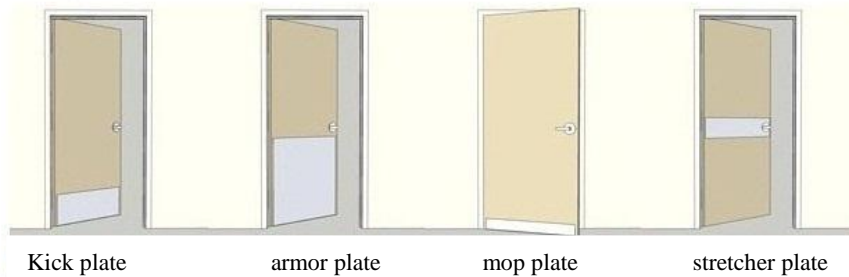



Contract range of pull handles&push

- A series of round bar pull handles for single bolt through fixing, or in Pairs fixed back to back.

- Supplied complete with fixings to suit timber doors .



-available in 19 mm and 22 mm diameters.

-For push and pull application chooses appropriate push plate.


Code: 2430033



Code: 2430052




- Available in Arabic Code: 2430007

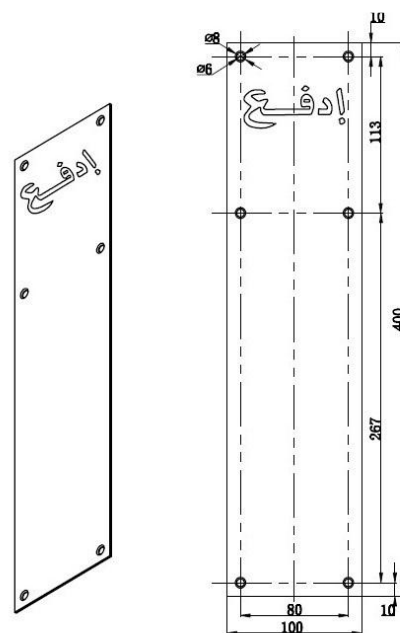

Contract range of door closer




Code: 2430091




A **door closer** is a mechanical device that closes a door, in general after someone opens it, or after it.

- 5014 BF BC: size 1~4
- 5014 BF BC/DA: size 1~4
- 5036 BC: size 3~6
- BF: Barrier Free function for elderly and/ or handicapped
- BC: Adjustable Back Check
- DA: Adjustable Delay Action



Selection Chart


Type	Dimension(mm/inch)					Suit For door weight
	A	B	C	D	E	
5014BF BC, 5014BF BC/DA	248 (9 3/4")	230 (9 1/16")	19 (3/4")	44.5 (1 3/4")	72 (2 7/8")	15-85 KG

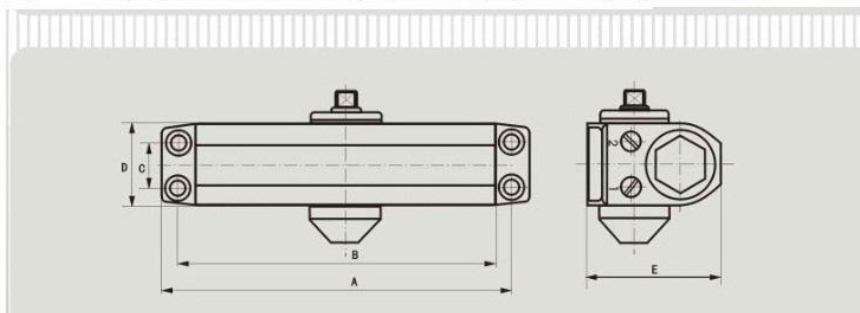



Contract range of panic device

A panic bar is a device
For unlocking a door
during emergency
conditions.

A series of touch bar
panic exit devices offering
single or double point
latching

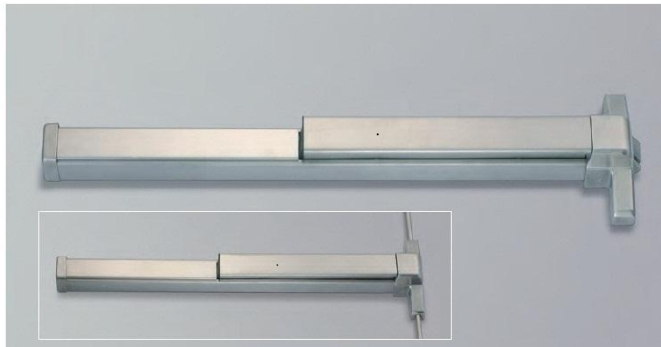


- Hold-back-function available
- Vertical rods
- latch with single point

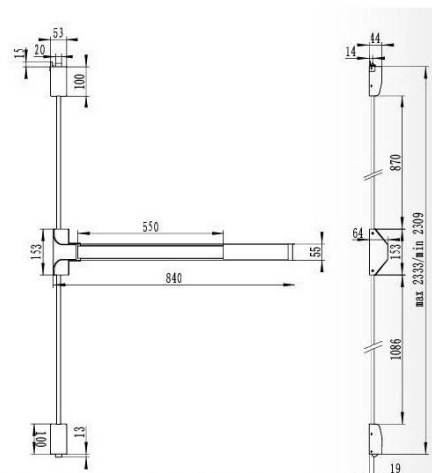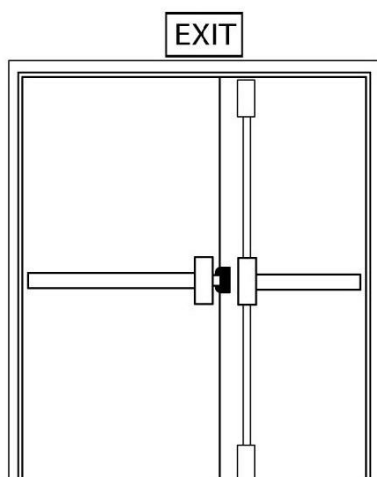

Code: 2430047

Touch bar vertical rod panic bolt with two
point latching.

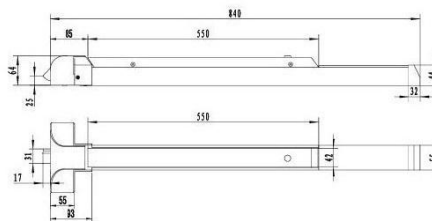


Code: 2430046

Touch bar panic latch as above with Hold-Back
function.

OUTSIDE TRIM FOR PANIC EXIT DEVICE

- External access lever/knob trim unit for use
with panic exit hardware. Key locks/unlocks
the lever/knob handle.

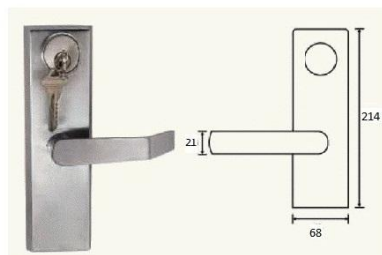


Code: 2430048

Contract range of Accessories


- Lever action flush bolts available for timber and metal doors



Code: 2430060

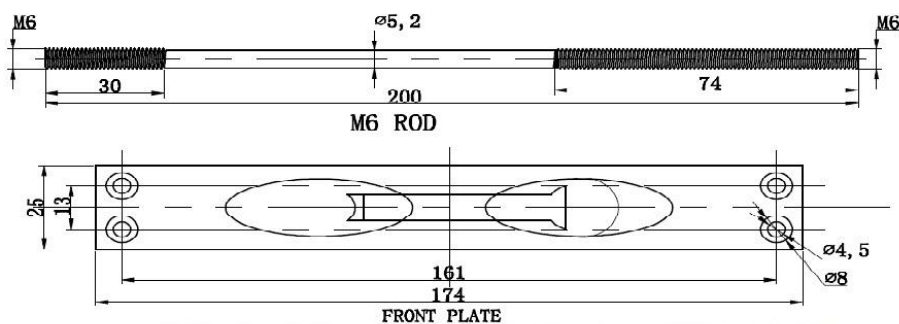

- A strike plate for a lock with a spring plunger that completely fills the bolt hole when the bolt is not in it.



Code: 2430021



Code: 2430022





Code: 2430100

Code: 2430019

- used to prevent doors from opening too far and damaging nearby walls.

- A range of floor and wall mounted door stops



HIGH QUALITY FOOT OPERATED DOOR HOLDER KICK DOWN DOOR
STOP STOPPER / STAY OPEN


Code: 2430011






Security : Barrel Bolts : Safety and security items that add additional protection to the doors and windows in your home.

- zinc alloy heavy duty



Code: 2430051

UL. FIRE-RATED, ADJUSTABLE Z-BLADE LOUVER

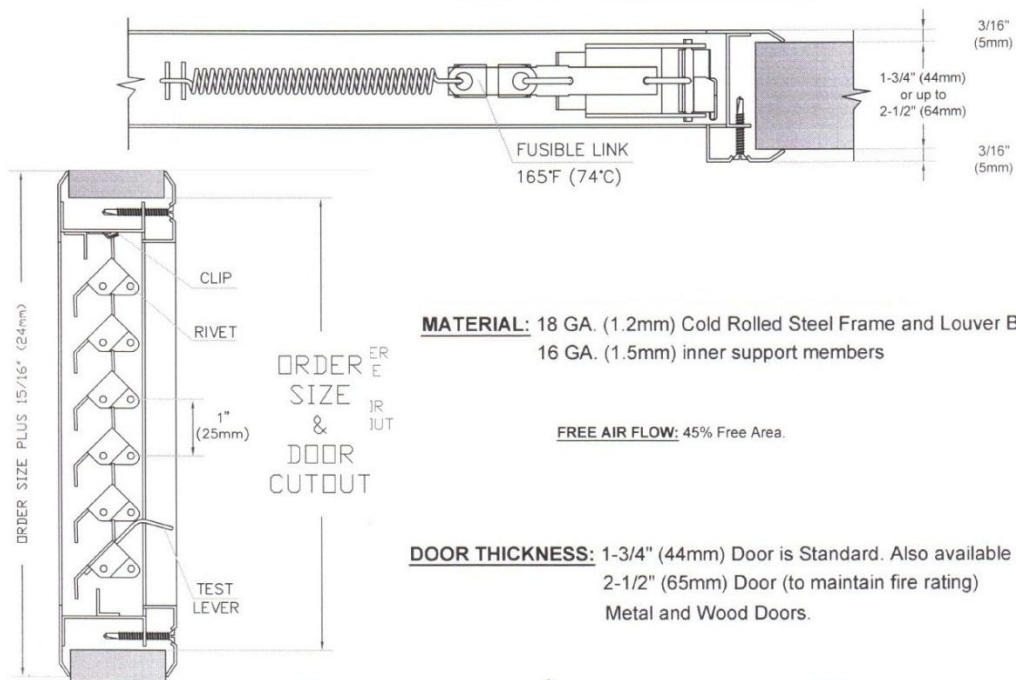

MATERIAL: 18 GA. (1.2mm) Cold Rolled Steel Frame and Louver Blades
16 GA. (1.5mm) inner support members





FREE AIR FLOW: 45% Free Area.

DOOR THICKNESS: 1-3/4" (44mm) Door is Standard. Also available up to 2-1/2" (65mm) Door (to maintain fire rating)
Metal and Wood Doors.

Contract range of Hinges



- This hinges raise the door over uneven floors or carpeting.
- This rising butt hinges are available opening either right handed or left handed.

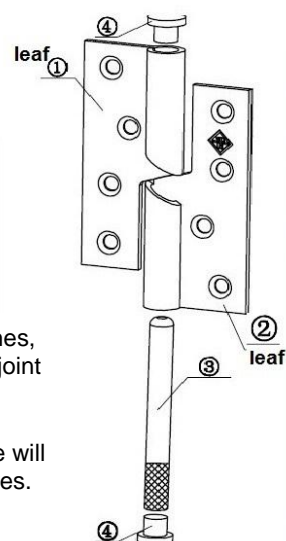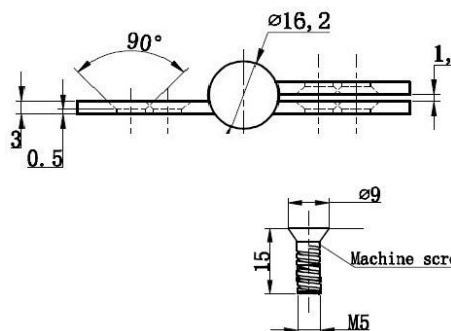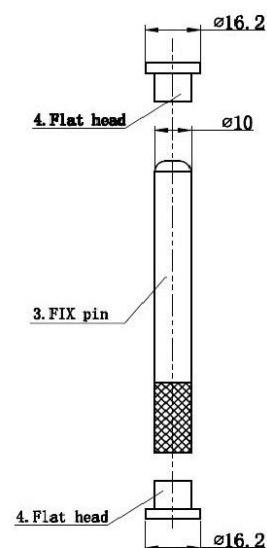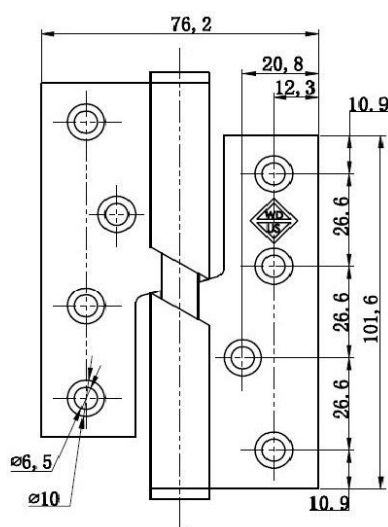




Code: RH hinge 2430017

Code: LH hinge 2430016

-These hinges have the advantage over ordinary butt hinges in that the door becomes, almost, self-closing. The weight of the door combined with the bevel on the hinged joint causes the door to close by itself, in the majority of cases.

Rising butts won't cause the door to automatically close fully, every time, but people will usually notice that the door is closing behind them, and complete the task themselves. No need to keep shouting "shut that door"

- Available in a stainless steel grades 202,304 and 316 -finish SS

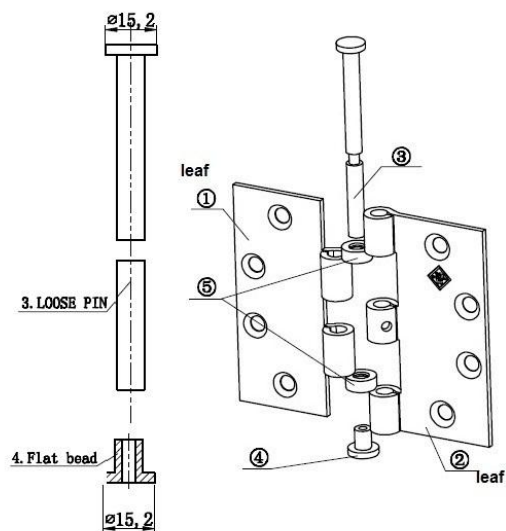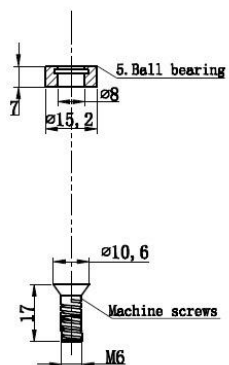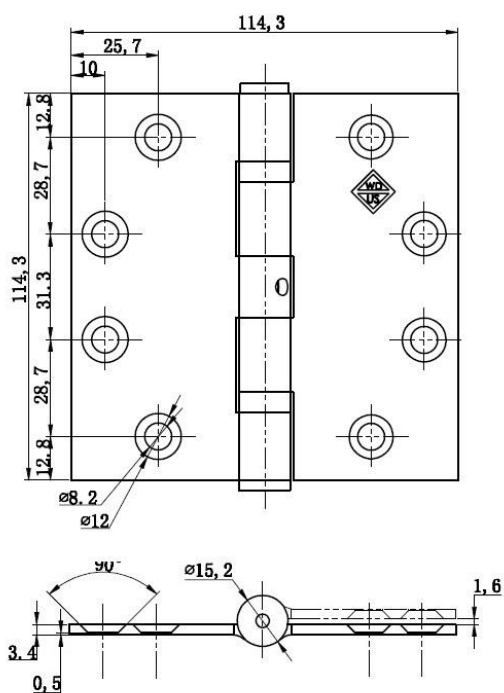



Anfal Hardware

Contact us.

Post Box: 87567

Riyadh: 11652

TEL: 00966-1-244 77 88

FAX: 00966-1-270 99 33

Email: hardware.sales@saudianfal.com

TEL: 00966-1-242 48 09

FAX: 00966-1-242 48 09