

Commercial and Industrial Rolling Shutter Doors

- Steel Flat Slat Rolling Shutter Doors
- Steel Curved Slat Rolling Shutter Doors
- Steel Grill Slat Rolling Shutter Doors
- Aluminum Grill Slat Rolling Shutter Doors
- Steel Insulated Slat Rolling Shutter Doors
- Aluminum Double Skin Non Insulated Slat Rolling Shutter Doors
- Aluminum Insulated Slat Rolling Shutter Doors
- Polycarbonate Slat Rolling Shutter Doors
- Aluminum Flat Slat Rolling Shutter Doors
- Perforated Steel Curved Slat Rolling Shutter Doors
- Perforated Steel Flat Slat Rolling Shutter Doors
- Steel Flat Slat Rolling Shutter Doors with Vision Panel

Anfal doors are durable, sturdy and economical to install and maintain. The best materials are used, the highest standards of quality are maintained, and through continual development and research we have engineered our rolling steel shutter doors to the highest level of specifications and standards.

We provide a complete installation service anywhere in kingdom of Saudi Arabia with experienced teams of engineers and technicians, as well as a full after-sales contract maintenance service, ensuring that the doors are kept in the best working condition



Saudi Anfal Factory for Automatic Doors

Kingdom of Saudi Arabia P.O. Box 87567, Riyadh 11652 Tel. : 2447788,
Fax : 2709933, C.R.: 1010140513, C.C.I.: 76423 E-mail : info@saudianfal.com
Customer Service Mobile No.: 0501505555 / 0558400900

RESIDENTIAL AND COMMERCIAL ROLLING SHUTTER DOOR

STEEL FLAT CURTAIN



CURTAIN TYPE : C-1A
HEIGHT : 75mm
THICK : 1mm
MAX. WIDTH : 8 M
MAX. HEIGHT : 6 M

STEEL FLAT CURTAIN



CURTAIN TYPE : C-1B
HEIGHT : 75mm
THICK : 0.7mm
MAX. WIDTH : 6 M
MAX. HEIGHT : 6 M

STEEL FLAT CURTAIN



CURTAIN TYPE : C-2A
HEIGHT : 100mm
THICK : 1mm
MAX. WIDTH : 7 M
MAX. HEIGHT : 5 M

STEEL FLAT CURTAIN



CURTAIN TYPE : C-2B
HEIGHT : 100mm
THICK : 0.7mm
MAX. WIDTH : 5 M
MAX. HEIGHT : 5 M

STEEL CURVED CURTAIN



CURTAIN TYPE : C-3A
HEIGHT : 75mm
THICK : 1mm
MAX. WIDTH : 9 M
MAX. HEIGHT : 6 M

STEEL FLAT CURTAIN WITH GROOVE



CURTAIN TYPE : C-4A
HEIGHT : 100mm
THICK : 1mm
MAX. WIDTH : 7 M
MAX. HEIGHT : 6 M

STEEL FLAT CURTAIN WITH GROOVE



CURTAIN TYPE : C-4B
HEIGHT : 100mm
THICK : 0.7mm
MAX. WIDTH : 5 M
MAX. HEIGHT : 6 M

STEEL GRILL CURTAIN




CURTAIN TYPE : C-5
OUTSIDE DIAMETER : 14mm
INSIDE DIAMETER : 11.6mm
THICK : 1.2mm
MAX. WIDTH : 8 M

ALUMINUM GRILL CURTAIN




CURTAIN TYPE : C-6
OUTSIDE DIAMETER : 14mm
INSIDE DIAMETER : 11mm
THICK : 1.5mm
MAX. WIDTH : 7 M

STEEL INSULATED CURTAIN



CURTAIN TYPE : C-7
HEIGHT : 61mm
DEPTH : 20mm
EXTERNAL SKIN : 0.8mm
INTERNAL SKIN : 0.7mm
MAX. WIDTH : 10 M
MAX. HEIGHT : 6 M

ALUMINUM NON INSULATED CURTAIN



CURTAIN TYPE : C-8
HEIGHT : 75mm
DEPTH : 20mm
EXTERNAL SKIN : 1.5mm
INTERNAL SKIN : 1.5mm
MAX. WIDTH : 9 M

ALUMINUM INSULATED CURTAIN



CURTAIN TYPE : C-9
HEIGHT : 75mm
DEPTH : 20mm
EXTERNAL SKIN : 1.5mm
INTERNAL SKIN : 1.5mm
MAX. WIDTH : 9 M

POLYCARBONATE CURTAIN




CURTAIN TYPE : C-10
HEIGHT : 100mm
THICK : 4mm
WIDTH : 300mm
HEIGHT : 100mm
MAX. WIDTH : 7 M

ALUMINUM FLAT CURTAIN




CURTAIN TYPE : C-11
HEIGHT : 75mm
THICK : 1.5mm
MAX. WIDTH : 8 M

PERFORATED CURVED CURTAIN



CURTAIN TYPE : C-12A
HEIGHT : 75mm
THICK : 1mm
MAX. WIDTH : 9 M
MAX. HEIGHT : 5 M

PERFORATED CURVED CURTAIN



CURTAIN TYPE : C-12D
HEIGHT : 75mm
THICK : 0.8mm
MAX. WIDTH : 6 M
MAX. HEIGHT : 5 M

Saudi Anfal Factory for Automatic Doors

Kingdom of Saudi Arabia P.O. Box 87567, Riyadh 11652 Tel. : 2447788,
Fax : 2709933, C.R.: 1010140513, C.C.I.: 76423 E-mail : info@saudianfal.com
Customer Service Mobile No.: 0501505555 / 0558400900

RESIDENTIAL AND COMMERCIAL ROLLING SHUTTER DOOR

انفال
Dalton

PERFORATED FLAT CURTAIN



CURTAIN TYPE : C-13A
HEIGHT : 100mm
THICK : 1mm
MAX. WIDTH : 6 M
MAX. HEIGHT : 6 M

PERFORATED FLAT CURTAIN



CURTAIN TYPE : C-13D
HEIGHT : 100mm
THICK : 0.8mm
MAX. WIDTH : 5 M
MAX. HEIGHT : 6 M

STEEL FLAT CURTAIN WITH VISION PANEL



CURTAIN TYPE : C-14B
HEIGHT : 75mm
THICK : 0.7mm
MAX. WIDTH : 5 M

STEEL FLAT CURTAIN WITH VISION PANEL



CURTAIN TYPE : C-15B
HEIGHT : 100mm
THICK : 0.7mm
MAX. WIDTH : 5 M

In special cases of door sizes, please contact us

TYPE OF ROLLING SHUTTER DOOR OPERATOR



MODEL GH

ROLLING SHUTTER / SECTIONAL OVER HEAD DOOR
SIDE MOUNTING MOTOR OPERATOR

STANDARD FEATURES

MOTOR

CONTINUOUS-DUTY HIGH STARTING TORQUE MOTOR WITH INSTANT REVERSE AND OVERLOAD PROTECTION. AVAILABLE IN 1/2 HP TO 5 HP; SINGLE OR THREE PHASE.

AUXILLIARY CHAIN HOIST

REDUCED DRIVE CHAIN HOIST WITH ELECTRICALLY INTERLOCKED FLOOR LEVEL DISCONNECT FOR MANUAL OPERATION. HOIST EASILY MOVED TO RIGHT OR LEFT HAND SIDE OF UNIT, ELIMINATING THE NEED TO ORDER LEFT OR RIGHT HAND MOUNTING.



MODEL J & G - JX

ROLLING SHUTTER DOOR
SIDE MOTOR OPERATOR

STANDARD FEATURES

J&G ALLOWS YOU TO OPERATE SEVERAL WAYS :
ELECTRONICS CONTROL, REMOTE CONTROL, AND MANUAL CONTROL

MOTOR ADVANTAGE

LOW NOISE, LIGHT VIBRATION, BEAUTIFUL APPEARANCE, SAFETY AND RELIABILITY, EASY TO INSTALL AND OPERATE

EMERGENCY MANUAL OPERATION

MODEL J&G - JX PROVIDES EASY EMERGENCY MANUAL OPERATION USING CHAIN HOIST MECHANISM

REQUIRED SIDEROOM

MINIMUM SIDEROOM 200mm AND OPPOSITE SIDE MOTOR SIDE MINIMUM 200 - 300mm
SIDEROOMS DEFENDS ON MOTOR WEIGHT CAPACITY



Saudi Anfal Factory for Automatic Doors

Kingdom of Saudi Arabia P.O. Box 87567, Riyadh 11652 Tel. : 2447788,
Fax : 2709933, C.R.: 1010140513, C.C.I.: 76423 E-mail : info@saudianfal.com
Customer Service Mobile No.: 0501505555 / 0558400900

RESIDENTIAL AND COMMERCIAL ROLLING SHUTTER DOOR

انفال
Dalton



MODEL JOLLY

ROLLING SHUTTER DOOR
CENTRAL MOTOR OPERATOR

STANDARD FEATURES

MOTOR
REVERSIBLE OPERATOR WITH REGULATION OF SELF REGISTERING RUNS STOP
FOR ROLLING SHUTTER BALANCED WITH SPRING
POWER SUPPLY: 230V - 60Hz
MAX DOOR WEIGHT: 220 - 450 Kg.

EMERGENCY MANUAL OPERATION
MODEL JOLLY PROVIDES EASY EMERGENCY MANUAL OPERATION USING
MANUAL RELEASED KNOB MECHANISM

REQUIRED 200mm SIDEROOM
MINIMUM SIDEROOM 100mm AND OPPOSITE SIDE MINIMUM 100mm

JOLLY



MODEL SOMFY (Centreo 2 & 4)

ROLLING SHUTTER DOOR
CENTRAL MOTOR OPERATOR

STANDARD FEATURES

MOTOR
THE CENTRAL MOTOR RANGE MAKES A METALLIC SHUTTER INTO A REAL AUTOMATIZED CLOSURE.
POWER SUPPLY: 220V - 60Hz
MAX DOOR WEIGHT: 150 - 200 Kg.

EMERGENCY MANUAL OPERATION
MODEL SOMFY PROVIDES EASY EMERGENCY MANUAL OPERATION USING
MANUAL DECLUTCHING HANDLE MECHANISM


REQUIRED 200mm SIDEROOM
MINIMUM SIDEROOM 100mm AND OPPOSITE SIDE MINIMUM 100mm

SOMFY

STANDARD SIDEROOM AND HEADROOM REQUIREMENT

SIDEROOM (LEFT / RIGHT)
SIDEROOM DEFENDS ON MOTOR TYPE, DOOR TYPE AND SIZE

HEADROOM
HEADROOM DEFENDS ON THE DOOR HEIGHT, THE HIGHER THE DOOR THE BIGGER THE HEADROOM NEEDED.

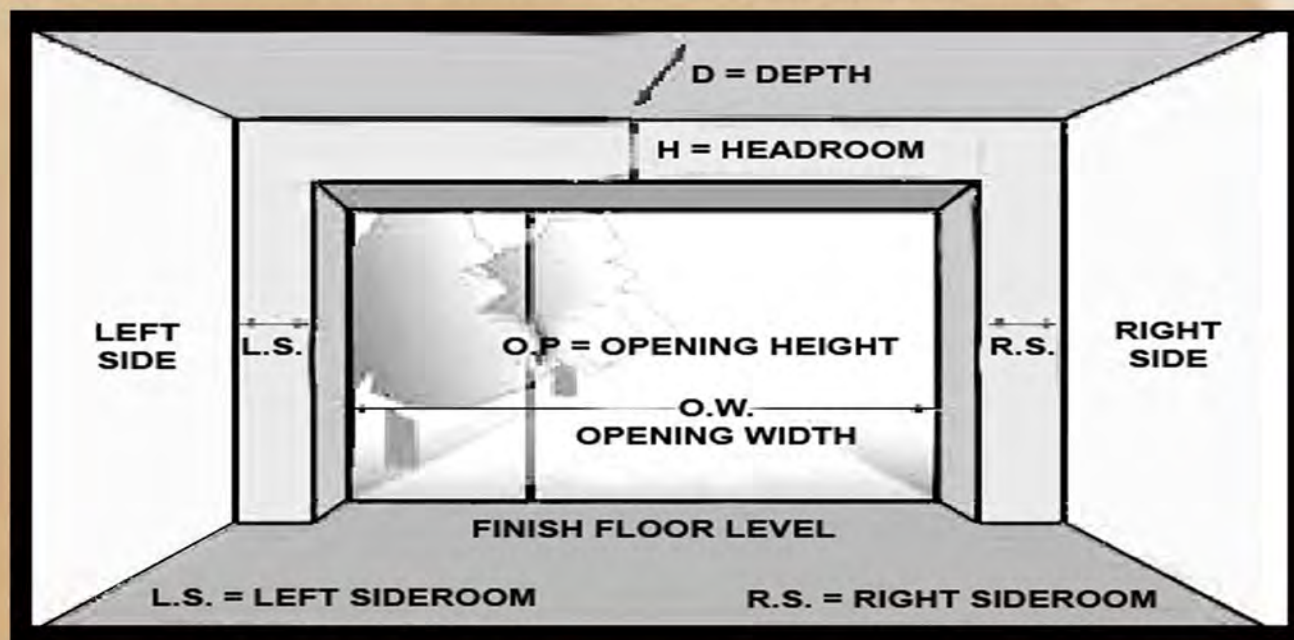

Saudi Anfal Factory for Automatic Doors

Kingdom of Saudi Arabia P.O. Box 87567, Riyadh 11652 Tel. : 2447788,
Fax : 2709933, C.R.: 1010140513, C.C.I.: 76423 E-mail : info@saudianfal.com
Customer Service Mobile No.: 0501505555 / 0558400900